

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 069 704 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
17.01.2001 Bulletin 2001/03

(51) Int Cl.7: H04B 7/005

(21) Application number: 99401766.3

(22) Date of filing: 13.07.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Agin, Pascal  
94370 Sucy en Brie (FR)

(74) Representative: El Manouni, Josiane  
COMPAGNIE FINANCIERE ALCATEL  
Dépt. Propr. Industrielle,  
30, avenue Kléber  
75116 Paris (FR)


(71) Applicant: ALCATEL  
75008 Paris (FR)

(54) Method for improving mobile radiocommunication system performances using a power control algorithm

(57) A method for improving performances of a mobile radiocommunication system using a power control algorithm for controlling a transmit power according to a transmission quality target value, and an adjustment algorithm for adjusting said transmission quality target

value according to transmission requirements, said method including, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm, by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

FIG. 2

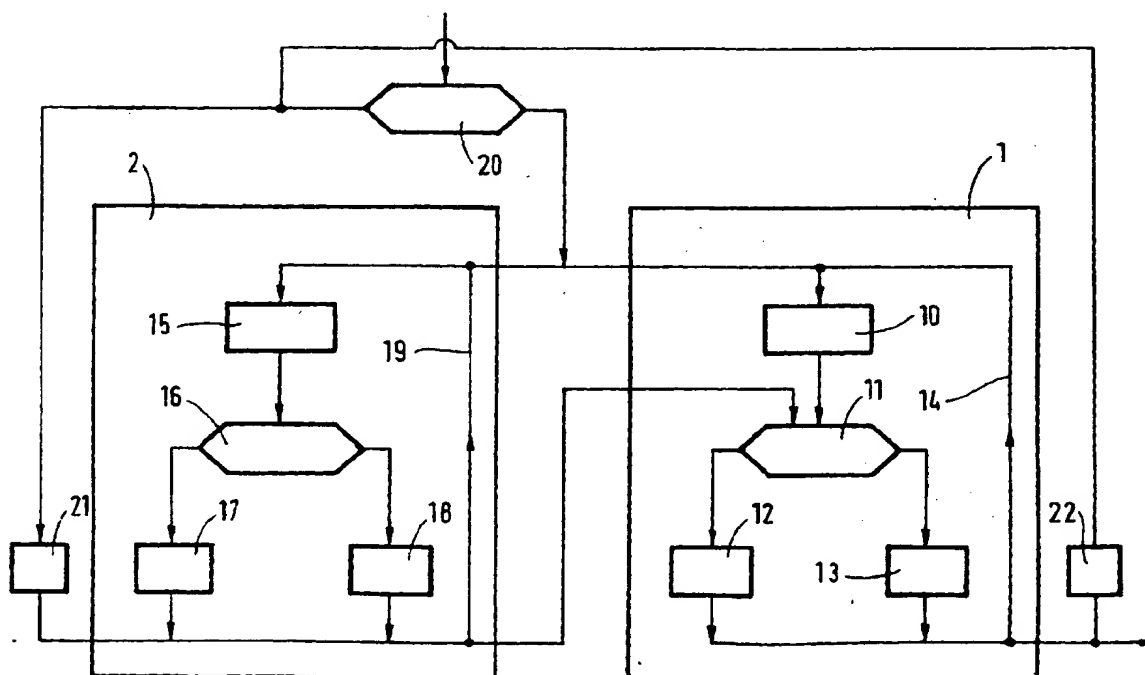

EP 1 069 704 A1

## Description

**[0001]** The present invention is generally concerned with mobile radiocommunication systems.

**[0002]** The present invention is more particularly concerned with power control techniques used in such systems to improve performances (in terms of quality of service, of capacity,... etc.).

**[0003]** The present invention is in particular applicable to mobile radiocommunication systems of CDMA ("Code Division Multiple Access") type. In particular, the present invention is applicable to UMTS ("Universal Mobile Telecommunication System").

**[0004]** As is known, CDMA systems use two types of power control techniques, a so-called open-loop power control technique, and a so-called closed loop power control technique (also called hereinafter CLPC). These power control techniques may be recalled for example for the uplink transmission direction, i.e. from MS ("Mobile Station") to BTS ("Base Transceiver Station"). In the open-loop power control, a MS transmit power is controlled based on the power received by this MS from a BTS. In the CLPC, a MS transmit power is controlled based on the transmission quality of the link between this MS and a BTS, as estimated at this BTS.

**[0005]** The transmission quality of a link between a MS and a BTS depends on the ratio of the received signal power and the interference power, also called SIR (Signal-to-Interference Ratio). When the SIR of a MS is low, or equivalently when the powers of the other MSs are much higher than its power, its performances dramatically decrease. The CLPC algorithm enables to keep the SIR of each user as close as possible to a target SIR.

**[0006]** The principle of the CLPC algorithm is that the BTS periodically estimates the SIR of the received signal from each MS, and compares this estimated SIR to a target SIR ( $SIR_{target}$ ). If the estimated SIR is lower than the target SIR, the BTS sends a power control command to the MS, for the MS to increase its transmit power. Otherwise, the BTS sends a power control command to the MS, for the MS to decrease its transmit power.

**[0007]** The target SIR is an important parameter in such systems. Indeed, if the target SIR value is set to a value higher than necessary, there is a needless contribution to interference level in the system, and therefore a needless degradation of the performances of the system; on the other hand if the target SIR value is set to a value lower than necessary, the performances of the on-going communication are degraded.

**[0008]** The target SIR is generally chosen as a function of the required quality of service, and is currently adjusted by a so-called outer loop algorithm (as opposed to the preceding one also called inner loop algorithm). The principle of the outer loop algorithm is to regularly estimate the quality of service (generally represented by a bit error rate BER or a frame error rate FER for voice services, or a block error rate BLER for data

packet services) and to compare the estimated quality with a required quality of service. If the estimated quality is below the required quality of service, the target SIR is increased. Otherwise, the target SIR is decreased.

**[0009]** As opposed to the inner loop algorithm which needs to be rapid to track the SIR variations as closely as possible, the outer loop algorithm needs to be slow, since the quality needs to be averaged over a certain period in order to have a reliable estimate. Typically, in third generation systems like for example UMTS ("Universal Mobile Telecommunications System"), the SIR of the received signal is determined and compared to the target SIR every slot in a frame, while the quality is averaged over several frames (a slot being an elementary time unit in a data unit, or frame, transmitted in such a system, the frame duration being typically equal to 10 ms, and the slot duration to 1/15 of the frame duration).

**[0010]** Such a slow process may however raise serious problems, in particular when a so-called compressed mode is used.

**[0011]** The downlink compressed mode has been introduced in UMTS in order to make possible for a user equipment (UE) to perform measurements on a frequency different from its downlink transmission frequency. It consists basically in stopping the downlink transmission during a certain amount of time (or transmission gap). Simultaneous uplink and downlink compressed modes can also be used when the measurement frequency is close to the uplink transmission frequency.

**[0012]** Because the instantaneous bit rate will have to be increased during compressed frames (by increasing the coding rate or decreasing the spreading factor), the target SIR also needs to be approximately increased by the same proportion.

**[0013]** Additionally, since the closed-loop power control is no longer active during transmission gaps for downlink and uplink, the performance are significantly degraded, mainly during compressed frames and recovery frames (frames just following compressed frames). The degradation can reach several decibels. In order to keep the same quality of service as in normal (or non-compressed) mode, this effect would also need to be compensated by increasing the target SIR during these frames.

**[0014]** However, the outer-loop power control algorithm is a slow process and several frames will be probably required before changing the target SIR accordingly. Therefore, it is likely that this process is too slow to be able to increase the target SIR in compressed and recovery frames as required. Moreover, the target SIR even risks to be increased just after compressed and recovery frames where it would not be needed.

**[0015]** Thus, there is a need for a faster process than the classical outer-loop algorithm, in compressed mode, to avoid degrading the performances.

**[0016]** More generally there is a need for a faster process than the classical outer-loop algorithm, in any case of change in the transmission requirements, including:

- change from a non-compressed mode to a compressed mode, or vice versa,
- change in required service (in particular change in the transmission rate),
- change in transmission rate, for a given required service (such as for example data packet services),
- change in environment conditions (such as mobile speed, radio propagation conditions, ....),
- ...etc.

[0017] Thus there is a general need for a more efficient power control, so as to improve performances.

[0018] An object of the present invention is therefore a method for improving performances of a mobile radiocommunication system using a power control algorithm for controlling a transmit power according to a transmission quality target value, and an adjustment algorithm for adjusting said transmission quality target value according to transmission requirements, said method including, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

[0019] According to another object of this invention, said method further includes, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm, by applying a corresponding change to said transmit power, so as to control it in an anticipated way.

[0020] In this way, performances are still improved by enabling the transmit power to be as quickly as possible close to the new transmission quality target value.

[0021] According to another object of this invention, said change in the transmission requirements includes a change from a non-compressed mode to a compressed mode, and said corresponding change includes an increase in said transmission quality target value, to be applied before a compressed frame.

[0022] According to another object of this invention, said change in the transmission requirements includes a change from a non-compressed mode to a compressed mode, and said corresponding change includes an increase in said transmission quality target value, to be applied after a transmission gap of a compressed frame.

[0023] According to another object of this invention, said change in the transmission requirements includes a change from a compressed mode to a non-compressed mode, and said corresponding change includes a decrease in said transmission quality target value, to be applied after a compressed frame.

[0024] According to another object of this invention, said change in the transmission requirements includes a change from a compressed mode to a non-compressed mode, and said corresponding change includes an increase in said transmission quality target value, to be applied during one or more recovery frames following

a compressed frame ending with a transmission gap.

[0025] According to another object of the present invention, said transmission quality is represented by a signal-to-interference ratio.

[0026] According to another object of this invention, said mobile radiocommunication system is of CDMA type.

[0027] According to another object of this invention, said power control is performed in the uplink transmission direction of said mobile radiocommunication system.

[0028] According to another object of this invention, said power control is performed in the downlink transmission direction of said mobile radiocommunication system.

[0029] Another object of the present invention is a mobile radiocommunication system including at least a transmitting entity and a receiving entity for performing such a method, and wherein means are provided in a first one of said entities, for, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

[0030] According to another object of this invention, means are provided in said first entity for determining and /or updating said corresponding change.

[0031] According to another object of this invention, means are provided in a second one of said entities for signalling to said first entity previous values necessary for determining and/or updating said corresponding change.

[0032] According to another object of this invention, means are provided in a second one of said entities for signalling to said first entity said corresponding change.

[0033] According to another object of this invention, means are provided in a second one of said entities for signalling to said first entity the occurrence of a change in said transmission requirements.

[0034] According to another object of this invention, means are provided in a second one of said entities for signalling said corresponding change to said first entity together with the signalling of the occurrence of a change in the transmission requirements.

[0035] According to another object of this invention, means are provided in any one of said two entities for recording said corresponding change.

[0036] According to another object of this invention, one of said two entities is a mobile radiocommunication network entity.

[0037] According to another object of this invention, one of said two entities is a mobile station.

[0038] Another object of the present invention is a mobile radiocommunication network entity comprising, for performing such a method in said uplink transmission direction:

- means for, upon the occurrence of a change in said

transmission requirements, bypassing said adjustment algorithm by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

**[0039]** According to another object of this invention, said mobile radiocommunication network entity further includes:

- means for, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm, by applying a corresponding change to said transmit power, so as to control it in an anticipated way.

**[0040]** Another object of the present invention is a mobile station comprising, for performing such a method in said downlink transmission direction:

- means for, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

according to another object of the present invention, said mobile station comprises, for performing such a method in said downlink transmission direction:

- means for, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm by applying a corresponding change to said transmit power, so as to control it in an anticipated way.

**[0041]** Another object of this invention is a mobile radiocommunication network entity comprising, for performing such a method in said downlink transmission direction:

- means for signalling said corresponding change to a mobile station.

**[0042]** According to another object of this invention a mobile radiocommunication network entity comprises, for performing such a method in said downlink transmission direction:

- means for signalling to a mobile station the occurrence of a change in said transmission requirements.

**[0043]** According to another object of this invention, a mobile radiocommunication network entity comprises, for performing such a method in said downlink transmission direction:

- means for signalling said corresponding change to

a mobile station, together with the signalling of the occurrence of a change in the transmission requirements.

**[0044]** According to another object of this invention, said change in the transmission requirements includes a change from a non-compressed mode to a compressed mode, and/or from a compressed mode to a non-compressed mode, and said signalling is performed together with the signalling of compressed mode parameters.

**[0045]** According to another object of this invention, said change in the transmission requirements includes a change from a non-compressed mode to a compressed mode, and/or from a compressed mode to a non-compressed mode, and said signaled corresponding change includes a component which corresponds to that part of said change in transmission requirements which is due to the transmission gaps of the compressed frames.

**[0046]** According to another object of this invention, said signalling is performed for each compressed frame.

**[0047]** According to another object of this invention, in the case where compressed frames occur periodically, said signalling is performed once for all, for all compressed frames of a thus defined period.

**[0048]** These and other objects of the present invention will become more apparent from the following description taken in conjunction with the accompanying drawings:

- figure 1 is a diagram intended to illustrate the different steps of a current power control process (whether in uplink or in downlink),
- figure 2 is a diagram intended to illustrate the different steps of a power control process modified so as to include a method according to the present invention (whether in uplink or in downlink),
- figure 3 is a diagram intended to illustrate an example of means which may be used in a mobile station and in a mobile radiocommunication network entity to perform a method according to the present invention, for uplink power control,
- figure 4 is a diagram intended to illustrate an example of means which may be used in a mobile radiocommunication network entity and in a mobile station, to perform a method according to the present invention, for downlink power control.

**[0049]** As recalled in figure 1, a current power control process includes an inner loop algorithm (herein also called power control algorithm) 1 and an outer loop algorithm (herein also called adjustment algorithm) 2.

**[0050]** The inner loop algorithm 1 includes the following steps:

- At step 10, a receiving entity estimates the aver-

aged received SIR during a period T,

- At step 11, the receiving entity compares this SIR to a target SIR,  $SIR_{target}$ .
- If  $SIR > SIR_{target}$ , at step 12 the receiving entity sends a "down" power control command to a transmitting entity, for the transmitting entity to decrease its power by  $\delta$  dB, where  $\delta$  is the power control step size of the algorithm,
- if  $SIR < SIR_{target}$ , at step 13 the receiving entity sends an "up" power control command to the transmitter, for the transmitting entity to increase its power by 6 dB.

[0051] This is periodically repeated, as illustrated by loop 14.

[0052] The outer loop algorithm 2 comprises the following steps:

- at step 15, the receiving entity estimates the averaged received quality (for example BER) during a period  $T' \geq T$
- at step 16, the receiving entity compares this estimated BER to a target BER (representing a required quality of service),
- If  $BER > BER_{target}$ , at step 17  $SIR_{target}$  is decreased,
- if  $BER < BER_{target}$ , at step 18  $SIR_{target}$  is increased.

[0053] This is periodically repeated, as illustrated by loop 19.

[0054] An example of modification of power control process so as to include a method according to the present invention will be disclosed in the following. It should however be noted that this example is not limitative and that the invention might as well be applied to other examples of algorithms.

[0055] In the example of figure 2 (where the same references than in figure 1 refer to the same elements) a new step 20 is introduced. In this step 20 there is determined if a change has occurred in the transmission requirements.

[0056] If such a change has not occurred, the outer loop algorithm 2 is performed as in figure 1.

[0057] If such a change has occurred, a new step 21 is performed, according to which a corresponding change is applied to said  $SIR_{target}$  value, so as to adjust it in an anticipated way, and thereby improve performances.

[0058] Besides, in the example of figure 2, if such a change has not occurred, the inner loop algorithm is performed as in figure 1. If such a change has occurred, a new step 22 is performed, according to which a corresponding change is applied to the transmit power, so as to control it in an anticipated way, and thereby still improve performances.

[0059] Such corresponding changes, corresponding to such changes in the transmission requirements, may have predetermined values, which may be determined in any way.

[0060] For example they may be seen as system parameters and be determined accordingly by the operator of the system. They may also be preably determined, in particular by simulation. In either case, they may be updated during operation. They may also be determined during operation based on previously obtained values, for example by averaging. In any case the obtention mode of said predetermined values should take into account all factors that are likely to influence said corresponding changes, or combinations of such factors.

[0061] Besides, they may be known in any one of the two entities (transmitting entity and receiving entity) involved in a power control process, to be used locally in this entity, or signalled to the other one of said entities, to be used in this entity.

[0062] Besides, they may be determined and/or updated in any of said two entities, based on statistics on previously obtained values, available either locally in this entity, or signalled to this entity by the other one of said entities.

[0063] Besides, they may be recorded in any one of said entities, to be recovered when necessary.

[0064] Besides, the occurrence of a change in the transmission requirements may either be known locally by the entity in charge of applying the corresponding change, or signalled to this latter entity by the other one of said entities.

[0065] Thus, every possibility may be envisaged; therefore the examples given in this description should be understood as illustrative only, and having no limitative character.

[0066] Figure 3 is a diagram intended to illustrate an example of means which may be used in a mobile radiocommunication network entity, noted 40, and in a mobile station noted 41, to perform a method according to the present invention, for uplink power control.

[0067] A mobile radiocommunication network entity 40, such as in particular BTS for "Base Transceiver Station" (or Node B in UMTS) and/or BSC for "Base Station Controller" (or RNC for "Radio Network Controller" in UMTS), may comprise, for performing said method in said uplink transmission direction (and further to other classical means not mentioned here):

- means 42 for, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm, by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

[0068] Mobile radiocommunication network entity 40 may also comprise, for performing said method in said uplink transmission direction (and further to other classical means not mentioned here):

- means, also noted 42 for, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm, by applying a cor-

responding change to said transmit power, so as to control it in an anticipated way.

**[0069]** Such corresponding changes, corresponding to such changes in the transmission requirements, may for example have predetermined values, which may for example be determined according to any of the above mentioned possibilities.

**[0070]** In any case, mobile radiocommunication network entity 40 for example may comprise :

- means 42' for recording said corresponding changes.

**[0071]** A mobile station 41 (or User Equipment UE in UMTS) may comprise, for performing said method in said uplink transmission direction (and further to other classical means not mentioned here):

- means 43 for signalling to a mobile radiocommunication network entity the occurrence of a change in the transmission requirements.

**[0072]** Figure 4 is a diagram intended to illustrate an example of means which may be used in a mobile radiocommunication network entity, noted 45, and in a mobile station, noted 46, to perform a method according to the present invention, for downlink power control.

**[0073]** A mobile station 46 (or User Equipment UE in UMTS) may comprise, for performing said method in said downlink transmission direction (and further to other classical means not mentioned here):

- means 48 for, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

**[0074]** Mobile station 46 may also comprise, for performing said method in said downlink transmission direction (and further to other classical means not mentioned here):

- means, also noted 48 for, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm by applying a corresponding change to said transmit power, so as to control it in an anticipated way.

**[0075]** Such corresponding changes, corresponding to such changes in the transmission requirements, may for example have predetermined values, which may for example be determined according to any of the above mentioned possibilities.

**[0076]** In one embodiment, mobile station 46 may comprise:

- means 48' for recording said corresponding changes.

**[0077]** In another embodiment, mobile radiocommunication network entity 45, such as in particular BTS for "Base Transceiver Station" (or Node B in UMTS) and/or BSC for "Base Station Controller" (or RNC for "Radio Network Controller" in UMTS), may comprise, for performing said method in said downlink transmission direction (and further to other classical means not mentioned here):

- signalling means 47 for signalling said corresponding change to mobile station 46.

**[0078]** Mobile radiocommunication network entity 45 may also comprise:

- signalling means, also noted 47, for signalling to a mobile station the occurrence of a change in the transmission requirements.

**[0079]** Advantageously, mobile radiocommunication network entity 45 may comprise :

- signalling means (also noted 47) for signalling said corresponding change to mobile station 46, together with the signalling of the occurrence of a change in the transmission requirements.

**[0080]** The present invention may be applied to any case of occurrence of a change in the transmission requirements, such as for example any of the above mentioned cases, or any combination of a plurality of such cases.

**[0081]** The present invention is however of particular interest together with the use of compressed mode, as now more particularly described.

**[0082]** In order to keep the signaling as low as possible, the target SIR increase due to the increased instantaneous bit rate and the target SIR increase due to degraded performances in compressed frames may be separated, which may be written:

$$\Delta_{SIR} = 10\log(R_{CF}/R) + \delta_{SIR}$$

where R is the instantaneous net bit rate before and after the compressed frame and  $R_{CF}$  is the instantaneous net bit rate during the compressed frame.

**[0083]** Since the bit rate variation will be known by the UE, only the additional target SIR increase  $\delta_{SIR}$  due to degraded performances during compressed frames may be signaled. The signaling overhead can be low if this variation is signaled with other compressed mode parameters (including transmission gap length, periodicity, ...). For example, 2 bits could enable to signal the following values of  $\delta_{SIR}$ :

- 00: 0 dB
- 01: 0.5 dB
- 10: 1 dB
- 11: 2 dB

[0084] Alternatively,  $\Delta_{SIR}$  could be directly signaled, but a larger number of bits would be required.

[0085] The UE will have to increase the target SIR by  $\Delta_{SIR}$  just before the compressed frames (or just after the transmission gap of the compressed frames) and decrease it back by the same value just after the compressed frames. This target SIR variation is done additionally to the usual downlink outer-loop algorithm that will have to take it into account. The UE may increase simultaneously its transmit power by the same amount before the compressed frame and decrease it just after the compressed frames in order for the downlink received SIR to be as quickly as possible close to this new target SIR.

[0086] Moreover, at least when the transmission gap is at the end of the compressed frame, the performances in the recovery frames can also be degraded because of the power control interruption during the transmission gap. Therefore, it would be also desirable to increase the target SIR in recovery frames and to signal this target SIR increase to the UE. Alternatively, the same value ( $\delta_{SIR}$ ) as for compressed frames could be used in order to decrease the required signaling.

[0087] Besides, said signalling may be performed for each compressed frame.

[0088] Alternatively, in the case where compressed frames occur periodically, said signalling may be performed once for all, for all compressed frames of a thus defined period, in order to reduce the required signaling.

## Claims

1. A method for improving performances of a mobile radiocommunication system using a power control algorithm for controlling a transmit power according to a transmission quality target value, and an adjustment algorithm for adjusting said transmission quality target value according to transmission requirements, said method including, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm, by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.
2. A method according to claim 1, further including, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm, by applying a corresponding change to said transmit power, so as to control it in an anticipated way.
3. A method according to any of claims 1 to 2, wherein said change in transmission requirements includes a change from a non-compressed mode to a compressed mode, and wherein said corresponding change includes an increase in said transmission quality target value, to be applied before a compressed frame.
4. A method according to any of claims 1 to 2, wherein said change in transmission requirements includes a change from a non-compressed mode to a compressed mode, and wherein said corresponding change includes an increase in said transmission quality target value, to be applied after a transmission gap of a compressed frame.
5. A method according to any of claims 1 to 4, wherein said change in transmission requirements includes a change from a compressed mode to a non-compressed mode, and wherein said corresponding change includes a decrease in said transmission quality target value, to be applied after a compressed frame.
6. A method according to any of claims 1 to 4, wherein said change in transmission requirements includes a change from a compressed mode to a non-compressed mode, and wherein said corresponding change includes an increase in said transmission quality target value, to be applied during one or more recovery frames following a compressed frame ending with a transmission gap.
7. A method according to any of claims 1 to 6, wherein said transmission quality is represented by a signal-to-interference ratio.
8. A method according to any of claims 1 to 7, wherein said mobile radiocommunication system is of CD-MA type.
9. A method according to any of claims 1 to 8, wherein said power control is performed in the uplink transmission direction of said mobile radiocommunication system.
10. A method according to any of claims 1 to 9, wherein said power control is performed in the downlink transmission direction of said mobile radiocommunication system.
11. A mobile radiocommunication system including at least a transmitting entity and a receiving entity for performing a method according to any of claims 1 to 10, and wherein means are provided in a first one of said entities, for, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm by applying a corresponding

change to said transmission quality target value, so as to adjust it in an anticipated way.

12. A mobile radiocommunication system according to claim 11, wherein means are further provided in a first one of said entities, for, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm by applying a corresponding change to said transmit power, so as to control it in an anticipated way.

13. A mobile radiocommunication system according to any of claims 11 to 12, wherein means are provided in said first entity for determining and/or updating said corresponding change.

14. A mobile radiocommunication system according to claim 13, wherein means are provided in a second one of said entities for signalling to said first entity previous values necessary for determining and/or updating said corresponding change.

15. A mobile radiocommunication system according to any of claims 11 to 14, wherein means are provided in a second one of said entities for signalling to said first entity said corresponding change.

16. A mobile radiocommunication system according to any of claims 11 to 15, wherein means are provided in a second one of said entities for signalling to said first entity the occurrence of a change in said transmission requirements.

17. A mobile radiocommunication system according to any of claims 11 to 16, wherein means are provided in a second one of said entities for signalling said corresponding change to said first entity together with the signalling of the occurrence of a change in the transmission requirements.

18. A mobile radiocommunication system according to any of claims 11 to 17, wherein means are provided in any one of said two entities for recording said corresponding change.

19. A mobile radiocommunication system according to any of claims 11 to 18, wherein one of said two entities is a mobile radiocommunication network entity.

20. A mobile radiocommunication system according to any of claims 11 to 19, wherein one of said two entities is a mobile station.

21. A mobile radiocommunication network entity comprising, for performing a method according to claim 9 in said uplink transmission direction:

- means for, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

22. A mobile radiocommunication network entity according to claim 21, further including:

- means for, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm, by applying a corresponding change to said transmit power, so as to control it in an anticipated way.

23. A mobile station comprising, for performing a method according to claim 10 in said downlink transmission direction:

- means for, upon the occurrence of a change in said transmission requirements, bypassing said adjustment algorithm by applying a corresponding change to said transmission quality target value, so as to adjust it in an anticipated way.

24. A mobile station according to claim 23, further comprising:

- means for, upon the occurrence of a change in said transmission requirements, bypassing said power control algorithm, by applying a corresponding change to said transmit power, so as to control it in an anticipated way.

25. A mobile radiocommunication network entity comprising, for performing a method according to claim 10 in said downlink transmission direction:

- means for signalling said corresponding change to a mobile station.

26. A mobile radiocommunication network entity comprising, for performing a method according to claim 10 in said downlink transmission direction:

- means for signalling to a mobile station the occurrence of a change in said transmission requirements.

27. A mobile radiocommunication network entity comprising, for performing a method according to claim 10 in said downlink transmission direction:

- means for signalling said corresponding change to a mobile station, together with the signalling of the occurrence of a change in the

transmission requirements.

28. A mobile radiocommunication network entity according to claim 27, wherein, said change in the transmission requirements including a change from a non-compressed mode to a compressed mode, and/or from a compressed mode to a non-compressed mode, said means include means for signalling said corresponding change together with the signalling of compressed mode parameters.
29. A mobile radiocommunication network entity according to claim 25, wherein, said change in the transmission requirements including a change from a non-compressed mode to a compressed mode, and/or from a compressed mode to a non-compressed mode, said means include means for signalling a component of said corresponding change which corresponds to that part of said change in transmission requirements which is due to the transmission gaps in compressed frames.
30. A mobile radiocommunication network entity according to claim 28 or 29, wherein said means include means for performing said signalling for each compressed frame.
31. A mobile radiocommunication network entity according to claim 28 or 29, wherein, in the case where compressed data units or frames occur periodically, said means comprise means for performing said signalling once for all, for all compressed frames of a thus defined period.

FIG. 1

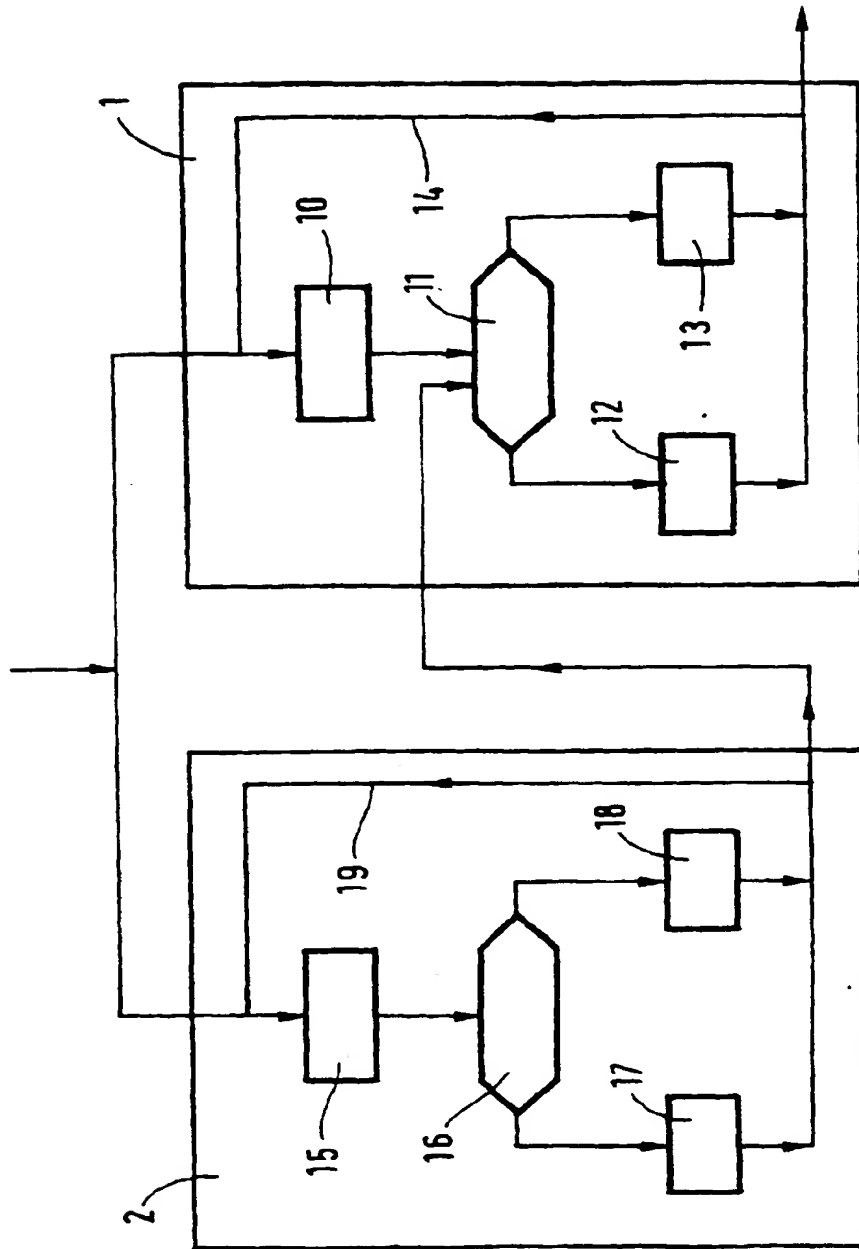


FIG. 2

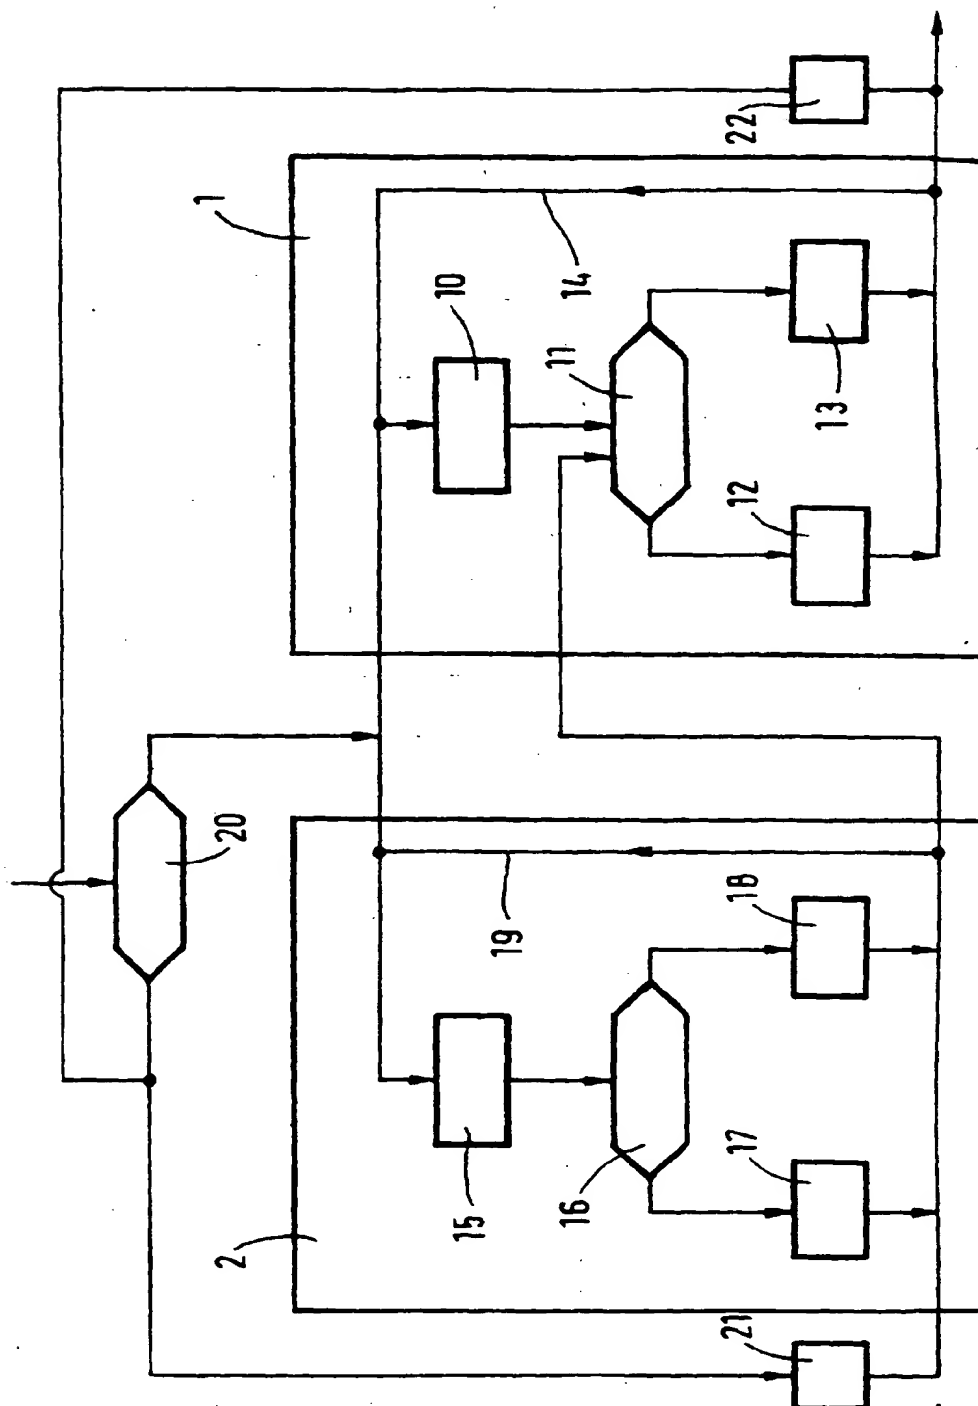


FIG. 3




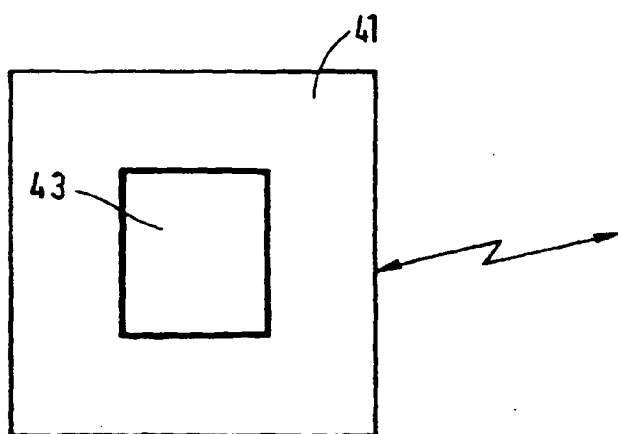


FIG. 4

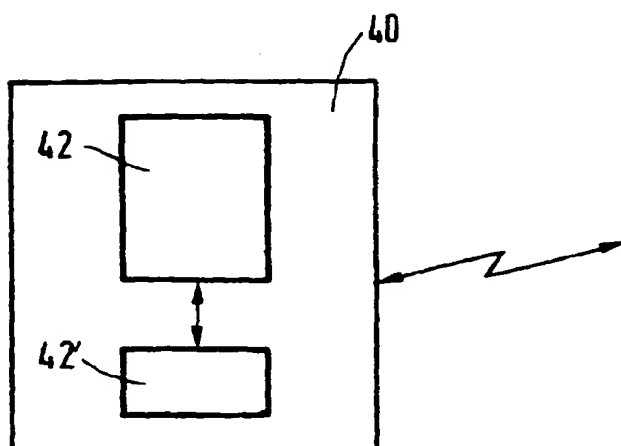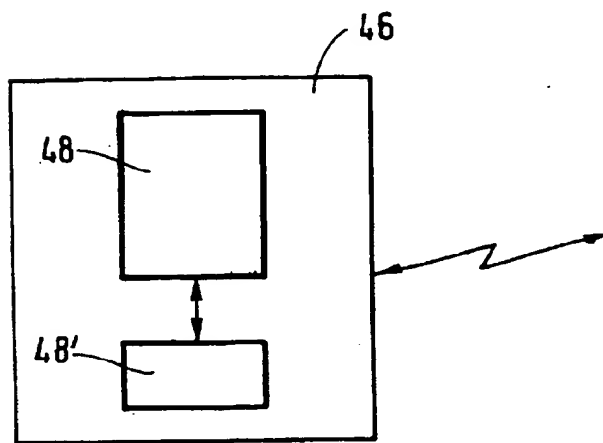

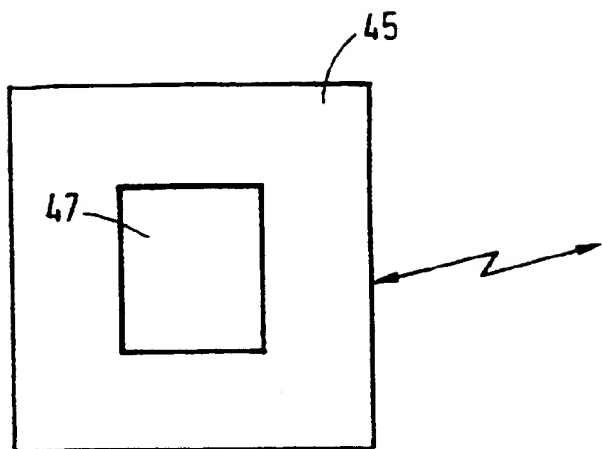

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 40 1766

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 396 516 A (ZIV NOAM ET AL) 7 March 1995 (1995-03-07)  * abstract; figures 1-3C * * column 3, line 11 - line 66 * * column 6, line 27 - column 8, line 5 * * column 8, line 42 - column 9, line 8 *	1,3,5, 7-11,13, 18-21,23	H04B7/005
A	US 5 333 175 A (ARIYAVISITAKUL SIRIKIAT ET AL) 26 July 1994 (1994-07-26)  * abstract; figures 2,3,5 * * column 9, line 30 - column 10, line 22 * * column 13, line 8 - column 14, line 34 * * column 15, line 56 - column 16, line 28 * * column 16, line 65 - column 17, line 20 *	1,2, 7-12, 19-24	
A	WO 98 58461 A (ERICSSON TELEFON AB L M) 23 December 1998 (1998-12-23) * abstract * * page 3, line 8 - line 25 * * page 4, line 29 - page 6, line 11 *	1,7-11, 19-21,23	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  H04B
A	EP 0 853 393 A (NIPPON TELEGRAPH & TELEPHONE) 15 July 1998 (1998-07-15) * abstract; figures 2-4 * * column 3, line 1 - line 31 * * column 3, line 57 - column 4, line 7 *	1,7-11, 19-21,23	
-/-			
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>22 December 1999</b>	Examiner <b>Sieben, S</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 02 (P04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 40 1766

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>SAMPATH A ET AL: "ON SETTING REVERSE LINK TARGET SIR IN A CDMA SYSTEM"</p> <p>IEEE VEHICULAR TECHNOLOGY CONFERENCE, US, NEW YORK, IEEE, vol. CONF. 47, page 929-933 XP000736744</p> <p>ISBN: 0-7803-3660-7</p> <p>* page 929, left-hand column, line 1 -</p> <p>page 930, left-hand column, line 4 *</p>	1,7-11, 19-21,23	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		22 December 1999	Sieben, S
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (704/01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 40 1766

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-12-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5396516 A	07-03-1995	AT 164712 T	15-04-1998
		AU 666811 B	22-02-1996
		AU 6099994 A	14-09-1994
		BR 9405695 A	21-11-1995
		CA 2156707 A	01-09-1994
		CN 1099920 A	08-03-1995
		DE 69409368 D	07-05-1998
		DE 69409368 T	01-10-1998
		EP 0685129 A	06-12-1995
		ES 2115215 T	16-06-1998
		FI 953938 A	22-08-1995
		HK 1005922 A	29-01-1999
		HU 73907 A, B	28-10-1996
		JP 8507185 T	30-07-1996
		MX 9401298 A	31-08-1994
		PL 309726 A	13-11-1995
		SG 52679 A	28-09-1998
		WO 9419876 A	01-09-1994
		ZA 9400516 A	05-09-1994
US 5333175 A	26-07-1994	NONE	
WO 9858461 A	23-12-1998	AU 8050198 A	04-01-1999
EP 0853393 A	15-07-1998	CA 2230778 A	31-12-1997
		CN 1198274 A	04-11-1998
		WO 9750197 A	31-12-1997

EPO FORM P445B

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82